



PLAN VIEW

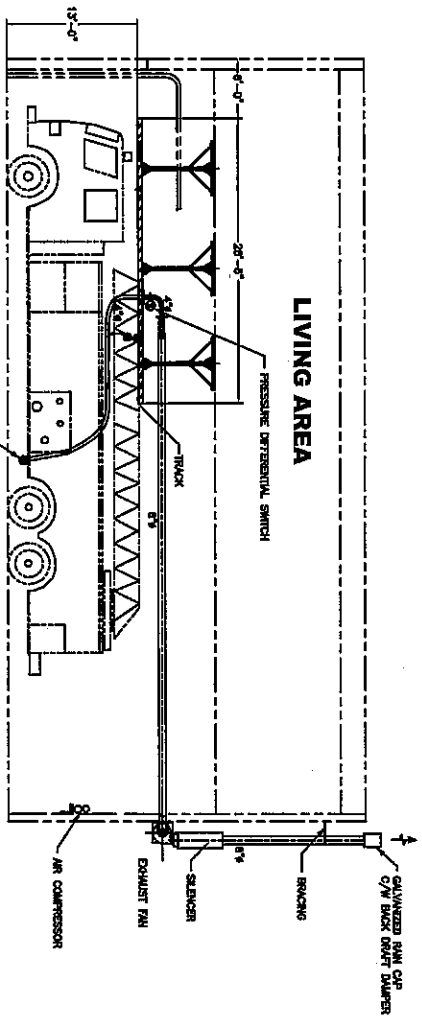

LIVING AREA

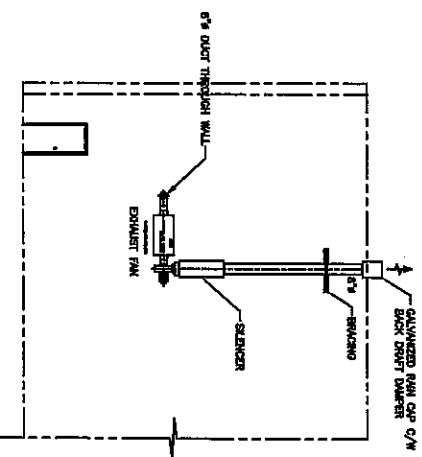

NOTES:

- ALL DUCT MATERIALS TO BE CONTINUOUS
- ANY SPLICING OF MATERIAL, FOR WHATEVER THAN THE ORIGINAL MATERIAL.
- EXHAUST FITTINGS SHALL BE LEAK PROOF
- EXHAUST ON ALL FITTINGS ON BOTH CABLES SHALL BE SEALED INSIDE AND OUT TO PRE
- EXHAUST CAP SHALL BE OF A WEIGHTERS AND SHALL BE COMPLETE WITH A BACK D
- ELECTRICAL SUB-CONTRACTOR SHALL VERIFY CONDITIONS PER SITE AND REPORT AS BEI CROSS-SECTION SHALL BE IN 281 AND 1
- ALL ELECTRICAL COMPONENTS SHALL BE U
- THE USE OF ELECTRICAL EQUIPMENT THAT THE MANUFACTURER'S LIST OF APPROVED ELECTRICAL EQUIPMENT ON INTERFERENCE TO OVERBOARD COMMUNICATIONS, COMPATIBLE TO OPERATING SYSTEM SHALL HAVE A ELECTRIC SELECTOR SWITCH SHOULD BE INSTALLED I (PUSHING) EXHAUST SYSTEMS.
- LABELLED LABELS SHALL BE PROVIDED AT OF COMPONENTS AND ON FUNCTION.
- ALL WIRING SHALL BE LABELLED AT BOTH ENDS AND IDENTIFIED BY THE MANUFACTURER PRIOR TURNOVER OF EACH INSTALLED SYSTEM AND INSPECTION, INCLUDING FULL OF DESIGN, AND TO THE SUBSCRIPTION OF THE DRAWING.

LEGEND

ELECTRICAL

W	WIRING
18	18 AMP 1
20	20 AMP
24	24 AMP
30	30 AMP
36	36 AMP
48	48 AMP
60	60 AMP
72	72 AMP
90	90 AMP
120	120 AMP

MECHANICAL

BR	BRASS
ST	STEEL
AL	ALUMINUM
IN	INCH

VEHICLE EXH

PLY

DE

C